

# Floor Access Doors


## KAFA

The KAFA is available in a variety of panels — recessed 1/8" for resilient tile, smooth, or embossed diamond pattern. Frames are easy to install and are sealed with a rubber cork strip.

### Specifications

Access doors shall be type KAFA

- Panels shall be 1/4" 6061-T5 aluminum with the following options: recessed 1/8" flush smooth plate or flush-diamond plate.
- Frame shall be 6063-T5 extruded aluminum with die cast corner connectors and shall be installed with rubber cork strip seal.
- Panel shall be secured with 10 - 24 x 3/4" stainless steel FHMS screws.

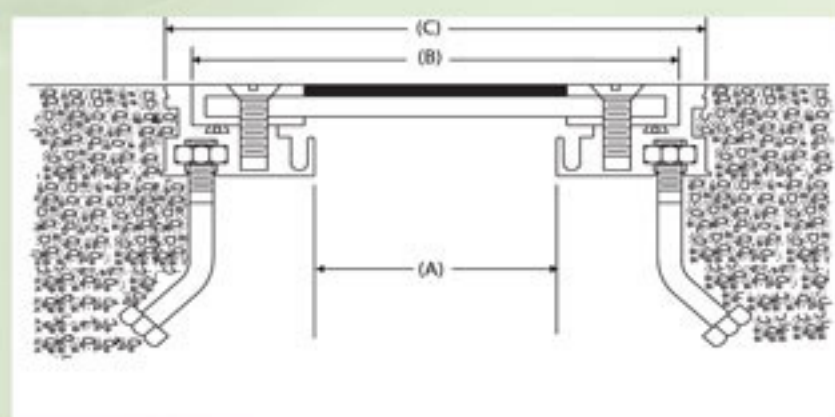

### Standard Sizes

| (A)<br>Door<br>Opening | (B)<br>Panel<br>Size | (C)<br>Frame<br>Size | Shipping<br>Wt (lbs.) |
|------------------------|----------------------|----------------------|-----------------------|
| 12 x 12                | 13 1/2 x 13 1/2      | 14 x 14              | 11.0                  |
| 18 x 18                | 19 1/2 x 19 1/2      | 20 x 20              | 19.0                  |
| 24 x 24                | 25 1/2 x 25 1/2      | 26 x 26              | 29.0                  |
| 30 x 30                | 31 1/2 x 31 1/2      | 32 x 32              | 53.0                  |
| 36 x 36                | 37 1/2 x 37 1/2      | 38 x 38              | 75.0                  |


Special sizes and modifications available on request.

Kafa Flush Diamond Plate

Kafa Flush Smooth Aluminum

Recessed 1/8" Smooth Aluminum

6063-T5 Extruded Aluminum Frame

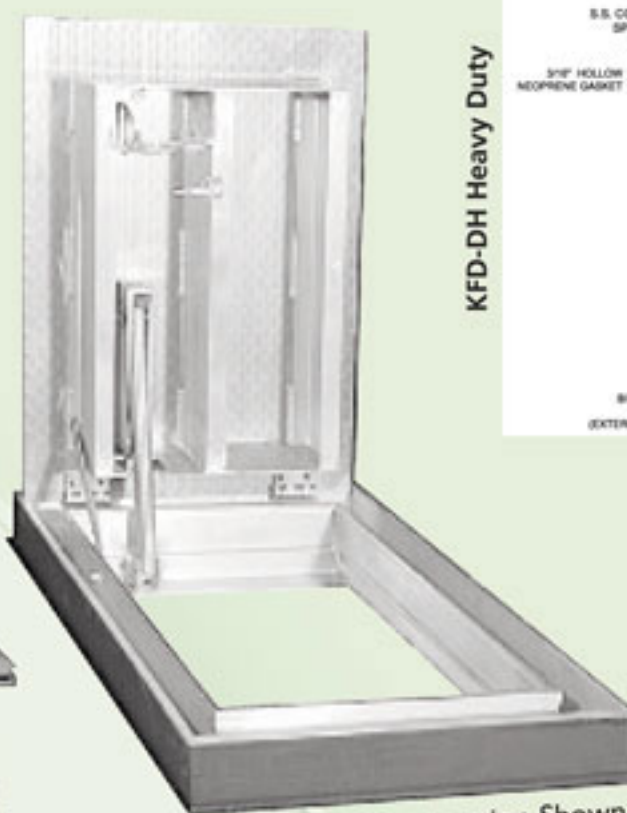

Watertight Construction Shown

Non Watertight Floor Doors Are Also Available

## KFD


The KFD provides sturdy access in any concrete application. The KFD-SD is standard duty (300#/sq. ft.) and the KFD-HD is heavy duty (H2O loading). When required, door can be made watertight, spring assisted and equipped with a stainless steel snap lock.

### Specifications


Access doors shall be type KFD-SD (300#/sq. ft.) or KFD-HD (H2O loading without impact).

- Frame shall be aluminum extrusion with integral anchorflanges (watertight frame includes drain channel and neoprene gasket).
- Hinges and all hardware shall be stainless steel.
- Door leaf shall be diamond tread plate to withstand a live load of 300 lbs./sq. ft. or H2O loading without impact. Operation shall be assisted with stainless steel compression springs (optional). A hold open arm shall automatically lock the door in a 90° position.
- Door can be equipped with a staple, staple and hasp, recessed hasp, stainless steel snap, brass pentahead or keyed cylinder lock.
- Finish shall be a mill finish, with bituminous coating applied to the exterior of frame.

View of KFD-SD Water Tight Door

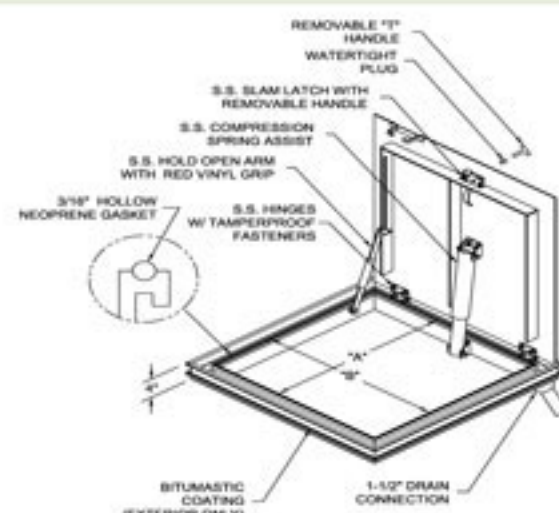

KFD-DH Heavy Duty

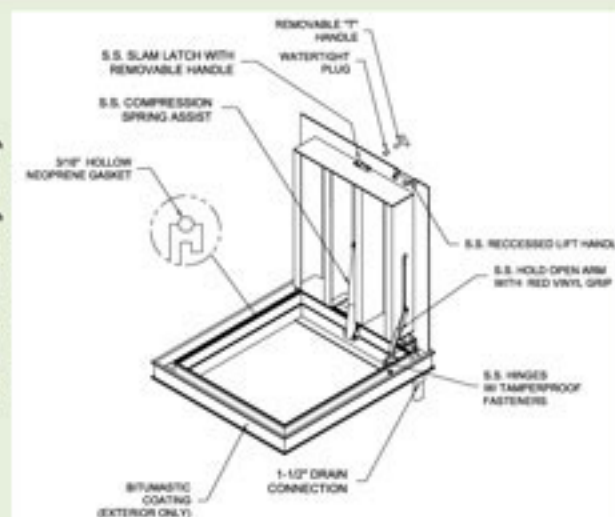

### Standard Sizes

| Frame<br>Opening<br>(AxB) | Shipping Wt.<br>KFD-SD | KFD-HD |
|---------------------------|------------------------|--------|
| 24 x 24                   | 50.0                   | 71.0   |
| 30 x 24                   | 56.0                   | 81.0   |
| 30 x 30                   | 63.0                   | 93.0   |
| 36 x 24                   | 62.0                   | 91.0   |
| 36 x 30                   | 70.0                   | 105.0  |
| 36 x 36                   | 78.0                   | 118.0  |
| 48 x 36                   | 97.0                   | 147.0  |
| 48 x 48                   | 118.0                  | 181.0  |
| 72 x 48                   | 158.0                  | 248.0  |

NOVACO INDUSTRIES • 4840 Acorn, Unit 200 • Montreal, Quebec • Canada • H4C 1L6

Telephone: (579) 720-7207 • Fax: (579) 720-7227

E-Mail: [info@novaco.com](mailto:info@novaco.com) • Web Site: [www.novaco.com](http://www.novaco.com)